

The Art of Ease





Dual Sense Surround Cooling

By minimizing direct airflow onto your food, the ingredients benefit from extended freshness.

Equipped with two independent sensors, custom cooling in each compartment ensures enhanced energy efficiency and food preservation through precise, overall temperature control.

Dual Sense Surround Cooling maintains food under a gentle airflow by efficient air distribution for even cooling throughout.

Selectable Zone*3



3°C

Select 3°C mode of the Selectable Zone. You can now have extra storage space for drinks and food. Preserve the freshness of your dairy, meat, and dry goods by storing them at an optimal temperature

within the Selectable Zone

compartment.

0°C

Choose the Soft Freeze setting to keep meat and fish fresh at - 3°C; you can easily prepare portions and cook them instantly without the need to defrost.

-3°C



Auto Ice Maker

Ensure your ice is always within reach by the automatic ice maker. The 4L water tank offers easy filling and cleaning, providing you with a constant source of ice whenever you need it.



Removes odour-causing components*1 and bacteria by 99%*2 throughout the entire refrigerator.

Ensures that the refrigerator including freezer compartment is filled with clean air, preventing the transfer of unpleasant odours.









Adjustable Door Racks

Easily adjust the height of the half racks to match the items being stored, the practical and secure door rack is designed for convenience.



Efficient Inverter Compressor

10 years warranty

Hitachi refrigerators use an energy-efficient, electronically controlled inverter compressor.


The compressor provides powerful cooling and lower noise.

^{*1} Triple Power Filter that catches and removes 7 odour components (Tested by Hitachi. The type of odours: Methyl Mercaptan, Ammonia, Acetaldehyde, Trimethylamine, Propanal,

^{*2} Thus also provides a sterilising effect. Combining the properties of Activated Carbon, Zeolite and Manganese Oxide (catalyst), the filter greatly reduces the percentage of odours present over time. Testing organisation: Boken Quality Evaluation Institute. Testing method: Film adhesion method (JISZ2801). Name of processing component: Filter. Sterilisati method: Application of oxidation catalyst to filter. Subject: Bacteria trapped in filter. Test results: 99% sterilised after 24 hours, achieved using the filter alone. No effect on the ent and food inside the refrigerator


^{*3} Tested by Arcelik Hitachi Home Appliances, the temperatures are approximate and may vary by ±2°C.



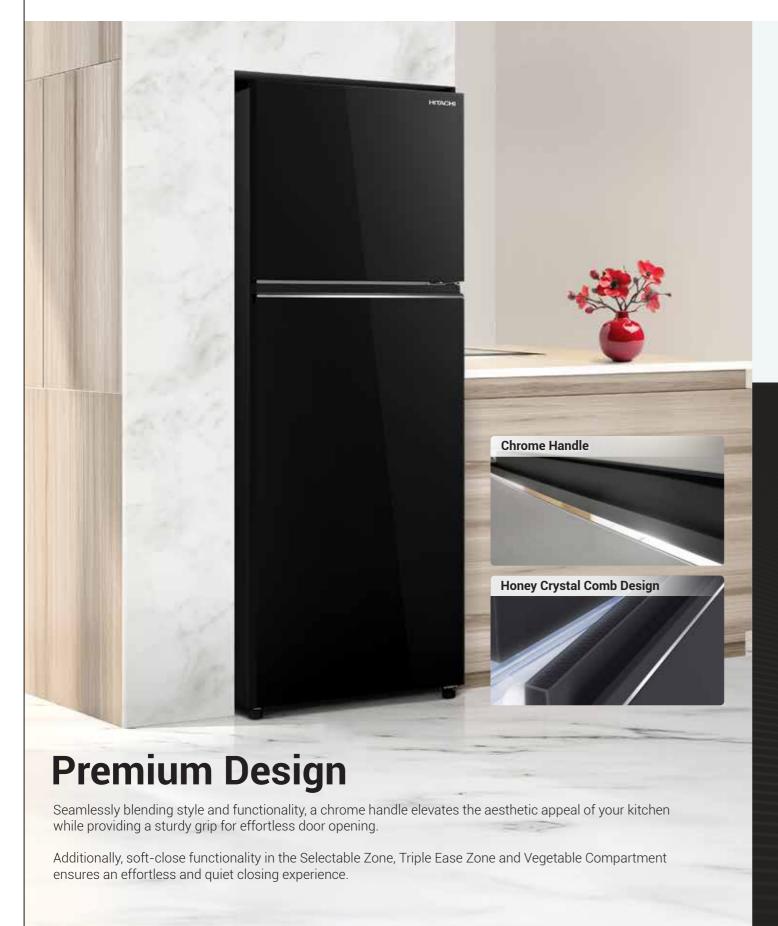

Triple Ease Zone

A dedicated space designed to maximize freezer storage and organisation.




Removes odours and bacteria by 99%*



Hygienic storage against meat leaks



organising drawer

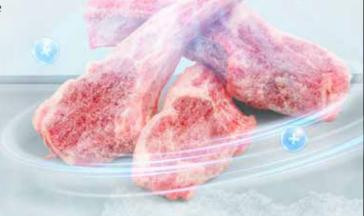



Vegetable Compartment

Preserves freshness andmaximize storage space for your fruit and vegetables, maintains the optimum moisture level.



Tempered Glass Shelves

Highly durable, scratch-proof, and heat-resistant shelves hold up to 100 kg*2 each for all your storage needs. Available in both in refrigerator and freezer.



Door Rack

With a huge capacity, even 5 large water bottles*3 can fit in one door rack. This ensures you have ample space to organize and easily access all your essentials right on the door.



Door Alarm

Designed to alert you when the door is left open, ensures that your food stays fresh and your energy bills stay low.

LED Light

Hitachi's energy saving LED lights provide enhanced illumination and clear visibility in refrigerator and freezer*4 without disturbing the eyes.



^{*1} Triple Power Filter that catches and removes 7 odour components (Tested by Hitachi. The type of odours: Methyl Mercaptan, Ammonia, Acetaldehyde, Trimethylamine, Propanal, Hexanal and Acetic Acid). Thus also provides a sterilising effect. Combining the properties of Activated Carbon, Zeolite and Manganese Oxide (catalyst), the filter greatly reduces the percentage of odours present over time. Testing organisation: Boken Quality Evaluation Institute. Testing method: Film adhesion method (JISZ2801). Name of processing component: Filter, Sterilisation method: Application of oxidation catalyst to filter. Subject: Bacteria trapped in filter. Test results: 99% sterilised after 24 hours, achieved using the filter alone. No effect on the environment and food inside the refrigerator.

^{*2} Weight resistance of Tempered Glass. Images are for illustrative purpose only.
*3 2-liter standard PET water bottles on the second door rack from the bottom.
*4 LED light in the freezer is exclusively available in 409L models.
*Images are for illustrative purposes only.

Specification

Product Code		HRTN6443SAGBKSG	HRTN6443SGBKSG	HRTN6443SXSG	HRTN6443SBBKSG	HRTN6443SPWHSG	HRTN6443SUSG	HRTN6408SXSG	HRTN6408SBBKSG	HRTN6408SUSG	HRTN6379SXSG	HRTN6379SBBKSG
Exterior Color		Glass Black	Glass Black	Elegant Inox	Brilliant Black	Pure White	Midnight Shine	Elegant Inox	Brilliant Black	Midnight Shine	Elegant Inox	Brilliant Black
Product Type	Top Freezer	•	•	•	•	•	•	•	•	•	•	•
Door	2 Door	•	•	•	•	•	•	•	•	•	•	•
Series	Grand Carbon Line	•	•	•	•	•	•	•	•	•	•	•
Features	Dual Sense Surround Cooling	•	•	•	•	•	•	•	•	•	•	•
	Selectable Zone	•	•	•	•	•	•	•	•	•	•	•
	Triple Power Filters	•	•	•	•	•	•	•	•	•	•	•
	Modular Twist Ice Maker	-	•	•	•	•	•	•	•	•	•	•
	Auto Ice Maker	•	-	-	-	-	-	-	-	-	-	-
	Triple Ease Zone	•	-	-	-	-	-	-	-	-	-	-
	Wellness Case	•	-	-	-	-	-	-	-	-	-	-
Specifications	Total Net Capacity (L)	407	409	409	409	409	409	374	374	374	344	344
	Freezer (L)	94	94	94	94	94	94	94	94	94	94	94
	Refrigerator (L)	313	315	315	315	315	315	280	280	280	250	250
	Efficient Inverter Compressor	•	•	•	•	•	•	•	•	•	•	•
	Digital Temperature Control	•	•	•	•	•	•	•	•	•	•	•
	Door Alarm	•	•	•	•	•	•	•	•	•	•	•
	LED Light	Freezer and Fridge	Fridge	Fridge	Fridge	Fridge	Fridge					
	Adjustable Door Racks	•	•	•	•	•	•	•	•	•	•	•
	Tempered Glass Shelves	•	•	•	•	•	•	•	•	•	•	•
Dimension & Weight	Width (mm)	660	660	660	660	660	660	660	660	660	660	660
	Height (mm)	1800	1800	1800	1800	1800	1800	1685	1685	1685	1595	1595
	Depth (mm)	720	720	720	720	720	720	720	720	720	720	720
	Weight (kg)	72	67	62	62	62	62	60	60	60	59	59

Specifications and designs are subject to change without notice.
 Colour tone of actual products may differ from those shown.

